


EdgePlus™ Solo ES400

IP Intelligence at the Door Incorporating any Reader for Stand-Alone Applications • 83400

- ▶ **True Flexibility** - Provides network connectivity for any existing or new Wiegand or compatible HID Clock and Data readers
- ▶ **Management** - Remotely managed over the network via standard web browser
- ▶ **Real Cost Savings** - Network access is CAT-5 for communications and Power over Ethernet (PoE). Eliminates the need for separate power supplies
- ▶ **Established Open Architecture** - Built on the HID OPIN™ platform, can be remotely reconfigured to a system reader in a host environment

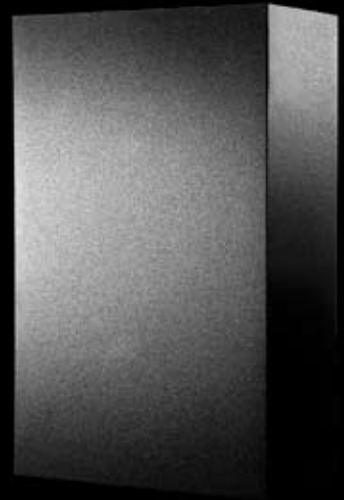

EDGE™

ACCESS Intelligence @ the Door

The HID EdgePlus IP Access Solution puts controller and user interface right at the door. The EdgePlus Solo ES400 is a cost-effective, stand-alone, single-door IP access control solution. This easy-to-use solution enables remote management and report generation via standard web browser. User information, administration, door configuration and retrieval of events are done through a user-friendly, instructional web environment. Providing “Intelligence at the Door”, the flexible EdgePlus Solo ES400 offers a wide choice of card reader compatibility. And the EdgePlus Solo ES400 IP Access Solution can be converted from stand-alone operation to a system reader for a host environment quickly and easily through the web browser. There is never a need to go to the door.

With a separately connected reader, EdgePlus is a perfect solution for migrating existing reader installations to the “edge” of the network. Whether the enterprise is iCLASS®, Prox, FlexSmart®, FlexPass®, MIFARE®/DESFire®, CRESCENDO™, or Wiegand output reader, EdgePlus delivers Intelligence at the Door.

Features

- ▶ Embedded User Interface, no external software requirement
- ▶ Remotely managed via standard web browser
- ▶ Works within DHCP or Static IP networks for plug and play installation
- ▶ “Door Dashboard” accesses door commands, status, alarms, and recent events from all screens
- ▶ Back-up and restore of data from user PC
- ▶ Built-in diagnostics
- ▶ Installer “calling card” allows inclusion of contact information for user support
- ▶ User upgradable firmware
- ▶ Built-in help screens
- ▶ Manages 1000 cardholders/credentials
- ▶ Manages 8 schedules and 3 intervals each day of the week including holidays
- ▶ View last 5000 events
- ▶ Standardized report generation, including CSV export
- ▶ Built-in 802.3af Power over Ethernet (PoE), with 600 mA available for external field devices and locking hardware
- ▶ Easily migrates to a host based system - (OEM OR CS)
 - ▶ After upgrade:
 - ▶ 40,000 credentials
 - ▶ 65000 Schedules
 - ▶ Full Edge/VertX® capacities
- ▶ Wet or Dry door relays
- ▶ Permits local laptop computer connections for diagnostics and configuration

Features

Specifications

Mounting

Mount to a single gang style electrical box with two screws. The EdgePlus includes tamper protection for this type of installation to secure all wiring within the electrical box. For indoor mounting only.

Easily Interfaced

- RJ-45 connector for Ethernet TCP/IP
- Quick-disconnect screw terminal connectors
- Easily upgrades to a hosted software solution through the network interface

Inputs for

- 1 reader
- 1 door monitor switch
- 1 Request-to-Exit switch
- AC Fail Monitor*
- Battery Fail Monitor*
- Enclosure Tamper

*Can be configured as a general purpose input

Non-latching wet/dry relay outputs for

- 1 door strike
- 1 auxiliary device: door held/forced alarm, alarm shunt, host offline (comms down), or general purpose

Cable Specifications

Ethernet	300 feet (100 m) Category 5 cable	ALPHA 9504C ALPHA 9405F
Wiegand	500 feet (150 m) 9-conductor, stranded, overall shield 22 AWG	ALPHA 1299C
Input Circuits	500 feet (150 m) 2-conductor, shielded 22 AWG 18 AWG	ALPHA 1292C ALPHA 2421C
Output Circuits	500 feet (150 m) 2-conductor 22 AWG 18 AWG	ALPHA 1172C ALPHA 1897C
RS-232	50 feet (15 m) 9-conductor, stranded 22 AWG	ALPHA 1299C ALPHA 58119

Minimum wire gauge depends on cable length and current requirements.

Mounting	Single-gang style electrical box
Dimensions	3.3" W x 4.8" H x 1.5" D (83.8 mm x 121.9 mm x 36.3 mm)
Weight	6.8 oz (.195 kg)
Style	Attractive UL94 polycarbonate enclosure protects components from damage and all connections are fully identified by silk-screened nomenclature.
Card Data Formats	Supports any card data format up to 128 bits
Hardware	32-bit RISC CPU, 100 MHz processor
Memory	8 MB onboard Flash memory 32 MB SDRAM 256K SRAM
Visual Indicators	Two LEDs indicate power/network activity and device I/O activity.
Power Supply Requirements	1 A @ 12-16VDC maximum Recommended: Power is supplied using the Power over Ethernet technology available with PoE (802.3af) enabled network devices. Alternate: Supervised linear power supply with battery backup, input surge protection, and AC Fail and battery low contact outputs. Relays can be configured to supply power as follows: Available Power: The E400 is capable of supplying a total of 700 mA to field devices. This power may be shared between a reader and one or two additional field devices. Unpowered, relay contacts are rated for 2 A @ 30VDC
Operating Temperature	The ES400 is intended for use in indoor environments that comply with the following specifications: 32° to 122° F (0° to 50° C)
Operating Humidity	5% to 95% relative, non-condensing
Communication Ports	Ethernet – 10 or 100 Mbps Reader - Wiegand, HID Clock and Data
Certifications	UL 294 and UL 1076 Listed Component for the US pending, CSA 205 for Canada, FCC Class B Verification, EMC for Canada, EU (CE Mark), Australia (C-Tick Mark), New Zealand, Japan
Warranty	Warrantied against defects in materials and workmanship for 18 months (See complete warranty policy for details).

© 2007 HID Global Corporation. All rights reserved. HID, the HID logo, EDGE, EdgeReader, EdgePlus, OPIN, and iCLASS are trademarks or registered trademarks of HID Global in the U.S. and/or other countries. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners. Rev. 3/2007



MKT-ES400_DS_EN



ACCESS Intelligence @ the Door

hidcorp.com

HID Global Offices:

Corporate North America
9292 Jeronimo Road
Irvine, CA 92618-1905
U.S.A.
Phone: (949) 598-1600
Fax: (949) 598-1690
EDGE Sales Support:
(877) 276.3346

Asia Pacific
19/F 625 King's Road
North Point
Island East
Hong Kong
Phone: +852 3160-9800
Fax: +852 3160-4809

Latin America
Circunvalacion Ote. #201 B
Despacho 2
Col. Jardines del Moral
Leon 37160, Gto.
Mexico
Phone: +52 477 779 1492
Fax: +52 477 779 1493

Europe, Middle East & Africa
Homefield Road
Haverhill, Suffolk
CB9 8QP
England
Phone: +44 (0) 1440 714 850
Fax: +44 (0) 1440 714 840